



HAILO S60 PROFISTEP UNO

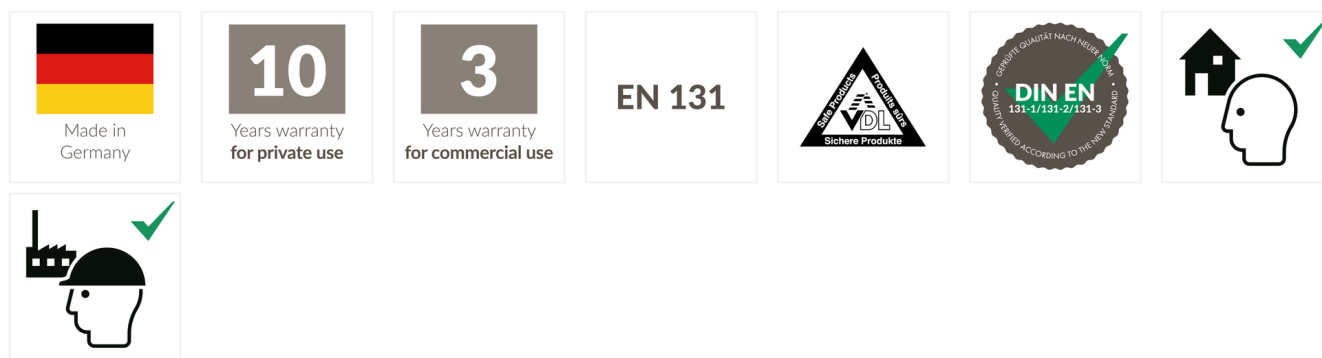
Light and safe single ladder for house and garden use. Simply indispensable.

THE KEY FEATURES







- 2 large, stable claw feet on the crosspiece (7112-007 / 7115-007 / 7118-007)
- Wide uprights and rungs, extremely stable, double-beaded upright-rung joins
- Length and cross-profiled rungs

OTHER PRODUCT ADVANTAGES

- Weather-proof and maintenance-free
- Full surface contact feet
- Upright cross-section 72 x 25 x 1.20 mm
- Rung cross-section 30 x 30 mm
- Rung spacing 280 mm
- Max. load capacity 150kg



SPECIFICATIONS

| | | |
|--|---|----------------------------------|
| Level of equipment | | 3 |
| Can be used as lean-to ladder | | ✓ |
| Material | | Aluminium / steel / plastic |
| Number of rungs |  | 12 |
| Width/depth required for setting up lean-to ladder |  | A = 85 cm, B = 88 cm |
| Max. working height | | 430 cm |
| Max. working height of lean-to ladder |  | 430 cm |
| Dimensions of packaging (HxWxD) |  | A = 339 cm, B = 34 cm, C = 11 cm |
| Weight |  | 6,6 kg |
| Load capacity |  | 150 kg |